

CablePro

Cable protection pipes for the construction of electrical and telecommunication networks.

PIPELIFE 
always part of your life

CABLE PROTECTION

QUALITY AND RELIABLE PROTECTION FOR YOUR COMMUNICATION NETWORKS

Both flexible and durable, PE piping systems are ideal for challenging terrain and withstand ground pressure and mechanical stress. Our CablePro pipes adapt easily to different installation requirements.

Pipelife offers a full range of double-walled polyethylene (PE) cable protection pipes for the construction of electrical and telecommunications networks. The product has high impact resistance and hardness classes of 750N and 450N with excellent mechanical strength. CablePro does not contain halogen and can be installed in concrete. The pipes are produced with an effective length of 6 meters, and come with a coupling, which is an integral part of the pipe.


PE corrugated cable protection pipes are developed with the required ring rigidity to ensure durability under harsh installation and service conditions.

+ LOW WEIGHT

+ WIDE RANGE OF PRODUCTS

+ FLEXIBLE, BUT WITH HIGH IMPACT RESISTANCE

+ 100% RECYCLABLE

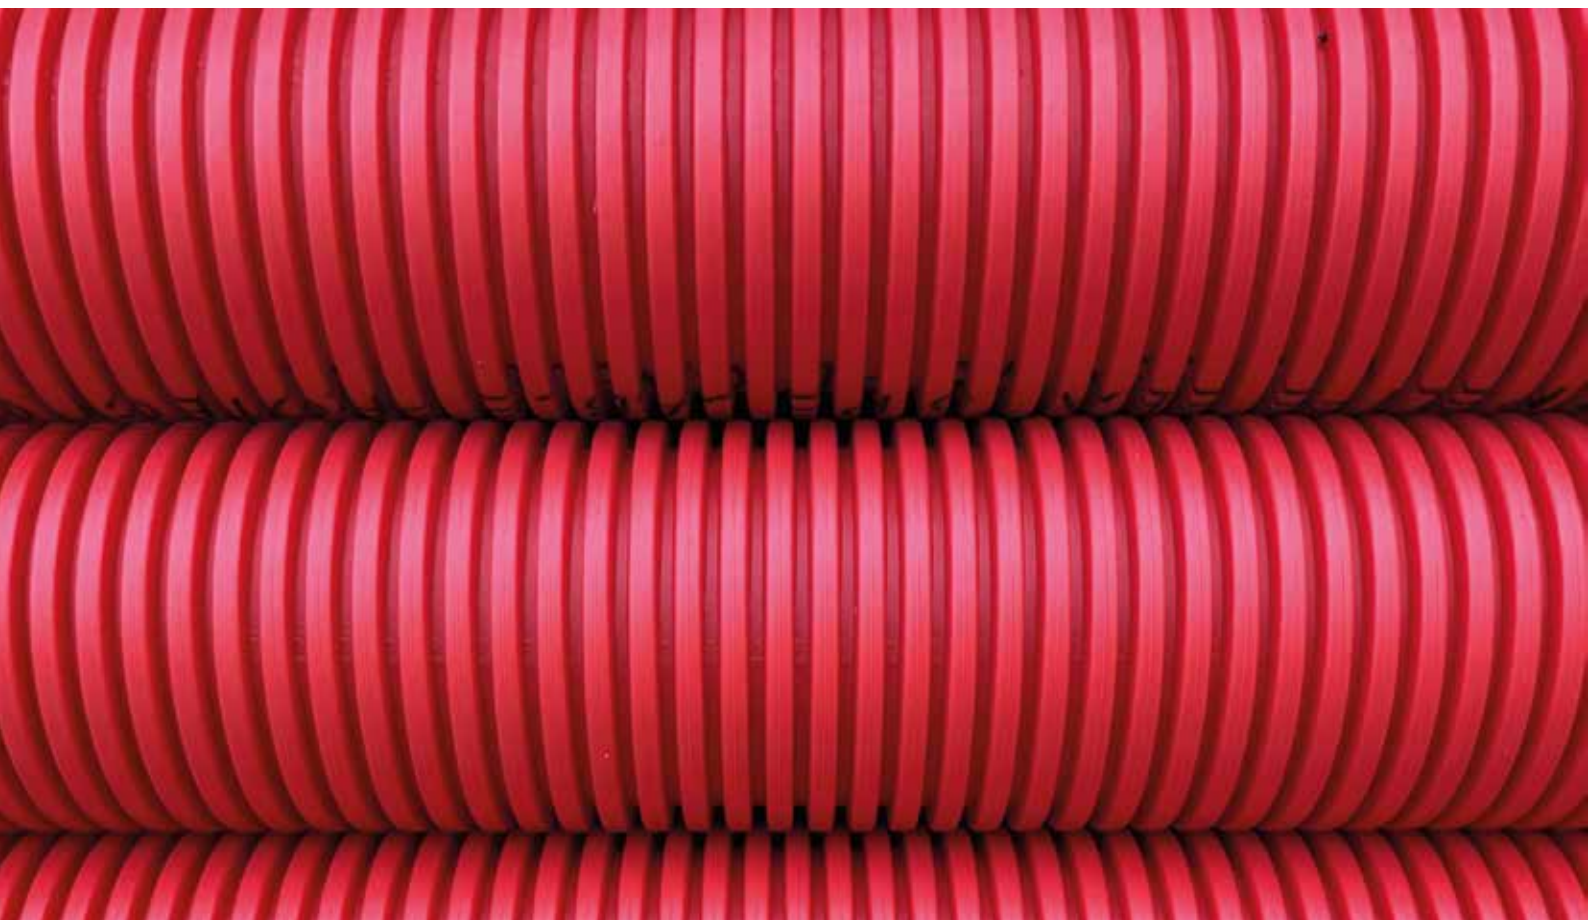

RANGE OF PRODUCTS

DOUBLE WALL CABLE PROTECTION PIPES 450N ACCORDING TO LOW VOLTAGE DIRECTIVE 2014/35/EU

450N CABLE PROTECTION PIPES ARE USED IN THE FOLLOWING CASES

- As a rule, in all densely populated and sparsely populated areas, where excavation work is rare.
- Under intersections, among other underground communications.
- Under intersections where the distance from the road surface level to the cable protection is at least 1.0 m.
- Under pedestrian and lightly loaded road areas, where the distance from the surface level to the cable protection is at least 0.5 m.



Outer diameter DN	Color out/in	Bars / coils	Packaging pipes in pallet
50	red /black	6m bar	80
75	red /black	6m bar	102
90	red /black	6m bar	58
110	red /black	6m bar	48
160	red /black	6m bar	35
200	red /black	6m bar	20
50	red /black	50m coil	1
75	red /black	50m coil	1
90	red /black	50m coil	1
110	red /black	50m coil	1
160	red /black	25m coil	1
200	red /black	25m coil	1

DOUBLE WALL CABLE PROTECTION PIPES 750N ACCORDING TO LOW VOLTAGE DIRECTIVE 2014/35/EU

750N CABLE PROTECTION PIPES ARE USED IN THE FOLLOWING CASES:

- In areas with frequent excavation activities.
- Under intersections, if the distance from the road surface level to the cable protection is from 0.5 to 1.0 m.
- Under high-traffic road areas, outdoor and park spaces, or in places where there is a high probability of mechanical impact.
- Outdoor and park spaces, where the distance from the surface level to the cable protection is from 0.3 to 0.5 m.



Outer diameter DN	Color out/in	Bars / coils	Packaging pipes in pallet
50	red /black	6m bar	80
75	red /black	6m bar	102
90	red /black	6m bar	58
110	red /black	6m bar	48
160	red /black	6m bar	35
200	red /black	6m bar	20



The contents and information contained in this brochure are intended for general marketing purposes only and shall not be relied upon by any person as complete or accurate. In particular, this brochure cannot replace proper expert advice on the characteristics of the products, their usage, suitability for any intended purpose, or the proper processing method. All contributions and illustrations in this brochure are subject to copyright. Unless explicitly otherwise stated, the repetition of content is not permitted. The use of photocopies from this brochure is for private and non-commercial use only. Any duplication or distribution for professional purposes is strictly forbidden. Non-Liability: PIPELIFE has established this brochure to the best of its knowledge. Pipelife cannot accept any liability suffered or incurred by any person resulting from or in connection with any reliance on the content of or the information contained in this brochure. This limitation applies to all loss or damage of any kind, including but not limited to direct or indirect damages, consequential or punitive damages, frustrated expenses, lost profit or loss of business.